

Non-Mydriatic Retinal Camera TRC-NW300

NEW



AUTO Focus

Exposure

Shoot



CONNECTING VISIONS

Ease of Use Combined with High Image Quality

Topcon reaches yet another milestone for ophthalmic instrumentation with the introduction of the TRC-NW300 Non-Mydriatic Retinal Camera. Built upon more than 40 years of experience in the manufacturing of retinal cameras, this modern instrument combines a simple method of image capture with superior image quality, by means of our unique 8 megapixel CCD camera.



NEW

TRC-NW300
NON-MYDRIATIC RETINAL CAMERA
TOPCON


Features

- Auto Focus, Auto Exposure & Auto Shoot
- All-in-One Design
- Auto Small Pupil Detection
- Direct Printout
- Imaging System Capability

Simple to Use!

Easy Alignment

Alignment is easily accomplished by simply overlapping two bright spots on the monitor. The operator remains in control of the image centering for consistent results.

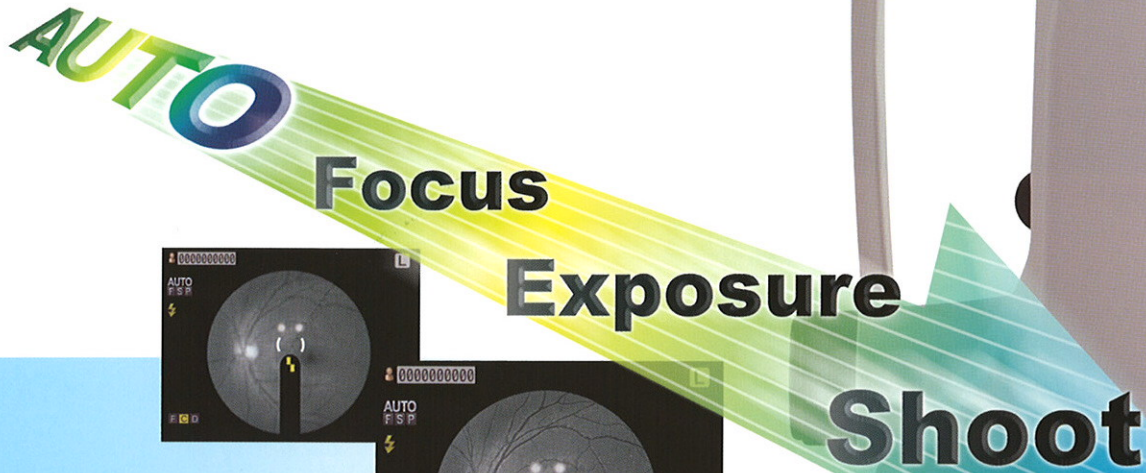

Auto Focus

The TRC-NW300 allows the operator to choose this function when photographing patients with high accommodation. Auto Focus ensures clear, sharp images every time.




Auto Exposure

This helps the operator by automatically adjusting the exposure to the necessary intensity for properly illuminated images.



Auto Shoot

The TRC-NW300 automatically captures a consistently sharp image without pressing the trigger button. The camera software verifies all the parameters before the capture, providing consistent results in every patient.

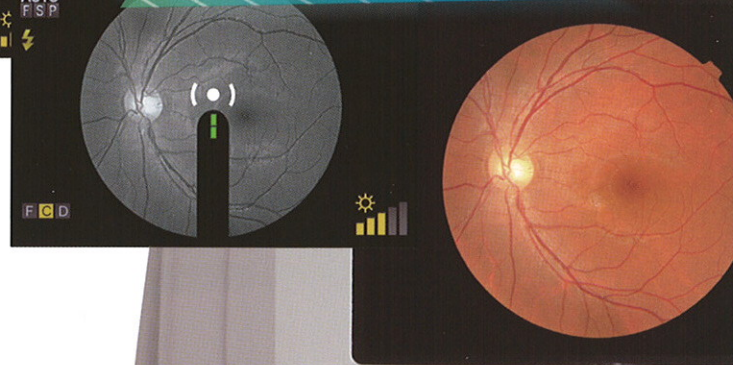


All-in-One Design

The TRC-NW300 features a built-in 8 megapixel CCD camera, which gives high quality imaging and an aesthetic appearance to the retinal camera itself. Thanks to this integrated design, external cabling is avoided, making operation simpler and faster. The all-in-one design is also beneficial for portability of the instrument.




Auto Small Pupil Detection


The TRC-NW300 can capture with a minimum pupil diameter of 3.3mm when the small pupil feature is used. This is a great advantage when photographing elderly patients, asymmetric pupils etc. The image will be consistently illuminated with equally spread flash intensity. The small pupil feature automatically switches on when a small pupil diameter is detected.

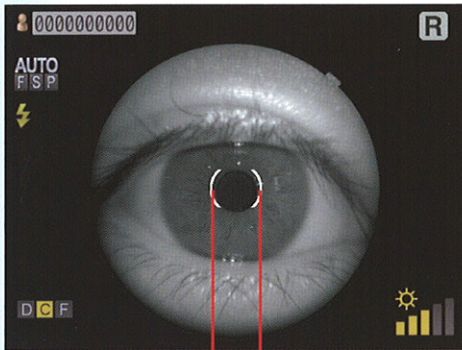

φ 3.3mm

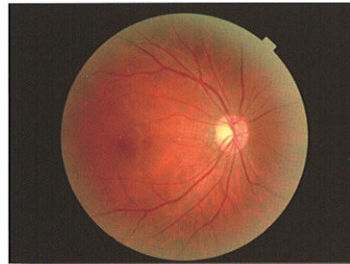

Auto Small Pupil Detection Mode :
Angle of coverage 45°

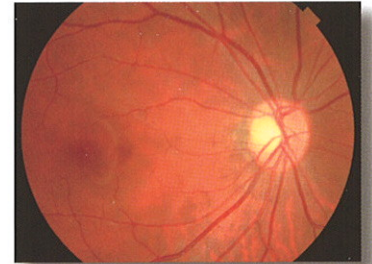


Auto Small Pupil Detection Mode :
Angle of coverage 30° (Digital zoom)

Lower Flash Intensity


With advanced software that allows for accurate control of the capturing process, the TRC-NW300 can optimize the exposure settings and lower the flash intensity, thereby increasing patient comfort and repeatability. Because of its innovative features including auto small pupil detection and low flash intensity, the TRC-NW300 will allow for more images to be captured before pupil constriction becomes a factor.

Fixation Target


In accordance with the requirements for diabetic screening, the TRC-NW300 offers central, nasal and temporal targets. The Optic Disc, the Macula and the Fovea can be specifically positioned for diagnostic photography. An External Fixation Target is optionally available for added flexibility.



Optic Disc "D"



Center "C"

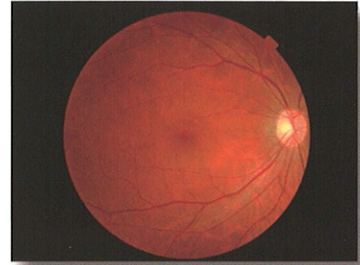


Fovea "F"

Data storage and Transmission

Thanks to the Windows® operating system incorporated in the TRC-NW300, images can be viewed and stored instantly on a USB memory stick or CF card.

System Chart

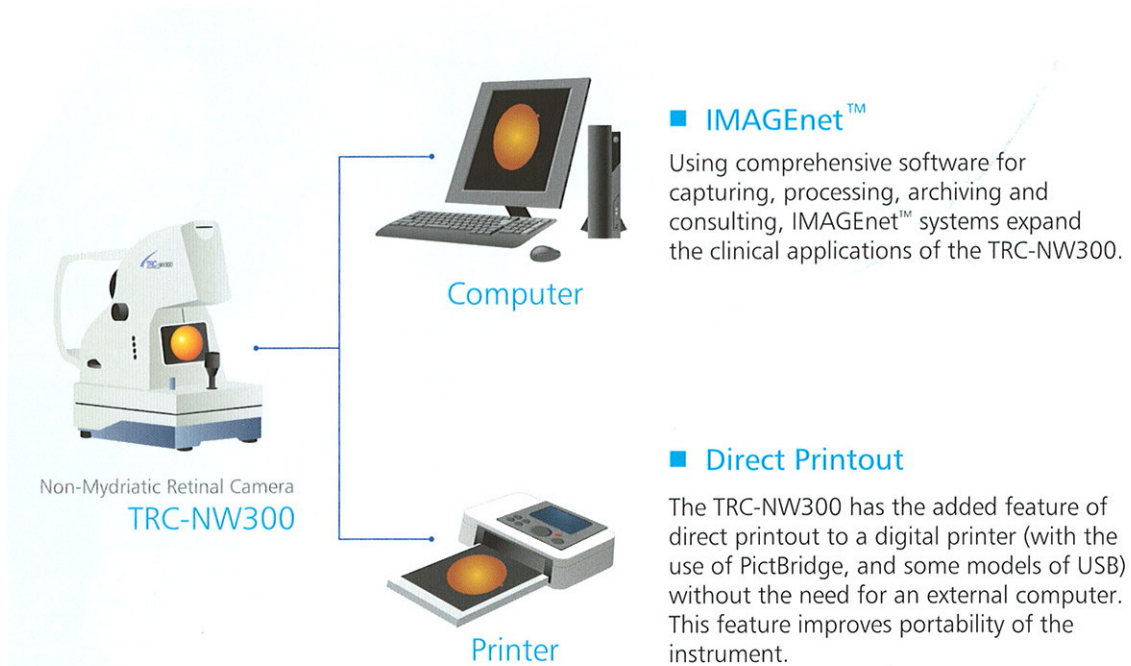

Specifications

Picture angle	45°
Working distance	40.7mm
Photographable area of pupil	φ 4.0mm or more (φ 3.3mm or more when the small pupil diaphragm is used)
Focus range to correct the refractive errors of the patient's eye	0 : -13D to +12D *1) - : -33D to -12D + : +9D to +40D
Internal fixation target	Center : Fixed 4 points Temporal side : Fixed 1 point Nasal side : Fixed 1 point Right / left eye automatic detection
Auto focus function	Used only in the split line working range (This can be turned ON / OFF)
Base movement	Back-forth : 46mm Right-left : 100mm Up-down : 30mm
Chinrest movement	67mm
Dimensions	274mm(W)×508mm(D)×528-558mm(H)
Weight	22.7kg

*1) Split line working range

Optional Accessory



External Fixation Target



*Subject to change in design and/or specifications without advanced notice.

IMPORTANT

In order to obtain the best results with this instrument, please be sure to review all user instructions prior to operation.



TOPCON CORPORATION



TOPCON CORPORATION



EC9711081



TOPCON

TOPCON CORPORATION

75-1 Hasunuma-cho, Itabashi-ku, Tokyo 174-8580, Japan. Phone:3-3558-2523/2522 Fax:3-3960-4214 www.topcon.co.jp

TOPCON MEDICAL SYSTEMS, INC.

37 West Century Road, Paramus, NJ 07652, U.S.A.
Phone:+1-201-599-5100 Fax:+1-201-559-5248 www.topconmedical.com

TOPCON CANADA INC.

110 Provencher Avenue, Boisbriand QC J7G 1N1, CANADA
Phone:+1-450-430-7771 Fax:+1-450-430-6457 www.topcon.ca

TOPCON EUROPE MEDICAL B.V.

Essebaan 11, 2908 LJ Capelle a/d IJssel, THE NETHERLANDS
Phone:+31-(0)10-4585077 Fax:+31-(0)10-4585045 www.topcon.it

ITALY OFFICE

Via Dell'Industria n. 60, 20037 Paderno Dugnano, (Milano), ITALY
Phone:+39-02-9186671 Fax:+39-02-91081091 www.topcon.it

DENMARK OFFICE

Praestemarksvej 25, 4000 Roskilde, DENMARK
Phone:+45-46-327500 Fax:+45-46-327555

IRELAND OFFICE

Unit 69 Western Parkway Business Centre,
Lower Ballymount Road, Dublin 12, IRELAND
Phone:+353-18975900 Fax:+353-118293915

TOPCON S.A.R.L.

89, Rue de Paris 92585 Clichy, Cedex, FRANCE
Phone:+33-(0)1-41069494 Fax:+33(0)1-47390251 www.topcon.fr

TOPCON DEUTSCHLAND G.m.b.H.

Giesslerallee 31-33, 47877 Willich, GERMANY
Phone:+49-(0)2154-8850 Fax:+49-(0)2154-885177 www.topcon.de

TOPCON SCANDINAVIA A.B.

Neongatan 2, 43121 Mölndal, SWEDEN
Phone:+46-(0)31-7109200 Fax:+46-(0)31-7109249 www.topcon.se

TOPCON ESPAÑA S.A.

Frederic Mompuou 5, Edificio Euro 3, 08960 Sant Just Desvern Barcelona, SPAIN
Phone:+34-93-4734057 Fax:+34-93-4733932 www.topcon.es

PORTUGAL OFFICE

Rua da Forte, 6-6A, L-0-22
2790-072 Carnaxide, PORTUGAL
Phone:+351-210-994626 Fax:+351-210-938786

TOPCON (GREAT BRITAIN) LTD.

Topcon House, Kennet Side, Bone Lane, Newbury, RG14 2PX U.K.
Phone:+44-(0)1635-551120 Fax:+44-(0)1635-551170 www.topcon.co.uk

TOPCON POLSKA Sp.z o.o.

ul. Warszawska 23 42-470 Siewierz, POLAND
Phone:+48-(0)32-6705045 Fax:+48-(0)32-6713405

TOPCON SOUTH ASIA PTE.LTD.

Blk 192 Pandan Loop, #07-01 Pantech Industrial Complex, SINGAPORE 128381
Phone:+65-62780222 Fax:+65-62733540 www.topcon.com.sg

TOPCON INSTRUMENTS (MALAYSIA) SDN. BHD.

No.D1,(Ground, Lower Ground & 1st Floor), Jalan Excella 2, Off Jalan Ampang Putra,
Taman Ampang Hilir, 55100 Kuala Lumpur, MALAYSIA
Phone:+60-(0)3-42709866 Fax:+60-(0)3-42709766

TOPCON INSTRUMENTS (THAILAND) CO.,LTD.

77/162 Sinnsalthorn Tower, 37th Floor, Krungthoburi Road,
Klongtongnai, Klongsarn, Bangkok 10600 THAILAND
Phone:+66-(0)2-440-1152-7 Fax:+66-(0)2-440-1158

TOPCON CORPORATION BEIJING OFFICE

Building B No.9, Kangding Street
Beijing Economic Technological Development Area, Beijing, 100176 CHINA
Phone:+86-(0)10-6780-2799 Fax:+86-(0)10-67802790

TOPCON CORPORATION SHANGHAI OFFICE

14L HUAMIN EMPIRE PLAZA, No.726, Yan-an Xi Road, Shanghai, CHINA
Phone:+86-(0)21-52387722 Fax:+86-(0)21-52370761

TOPCON CORPORATION BEIRUT OFFICE

P.O. BOX 70-1002 Antelias, BEIRUT-LEBANON
Phone:+961-(0)4-523525/523526 Fax:+961-(0)4-521119

TOPCON CORPORATION DUBAI OFFICE

P.O BOX 293705 Office C-25(row C-2) Dubai Airport Free Zone, Dubai, U.A.E.
Phone:+971-(0)4-2995900 Fax:+971-(0)4-2995901